

Part Number:
KXA00134 and KXA00135

Models:
Meteor 350cc MY20 Onwards


 **WARNING:** Royal Enfield genuine accessories are designed to fit only the specific Royal Enfield motorcycle(s) that are specified above. They should not be fitted to any other type of motorcycle. Pay particular attention to the warnings and cautions contained in this instruction, failure to do so may result in an incorrect installation of the accessory which could result in an unsafe riding condition and possible accident. If in any doubt always seek help from your authorised Royal Enfield dealer.

 **WARNING:** Before starting any accessory kit installation ensure the motorcycle is supported in a stable condition. Failure to support the motorcycle correctly could lead to motorcycle damage or personal injury.

 **WARNING:** All fixings must be tightened to the torque values specified in this instruction. Failure to tighten fixings to the correct torque could result in an unsafe riding condition and possible accident

 **CAUTION:** Care should be taken when fitting any accessory kit. Incorrect handling of kit components or the use of incorrect tools could lead to component or motorcycle damage.


NOTE: The content of this instruction is subject to change at any time without notice or liability. Royal Enfield reserves the right to revise the information presented at any time.

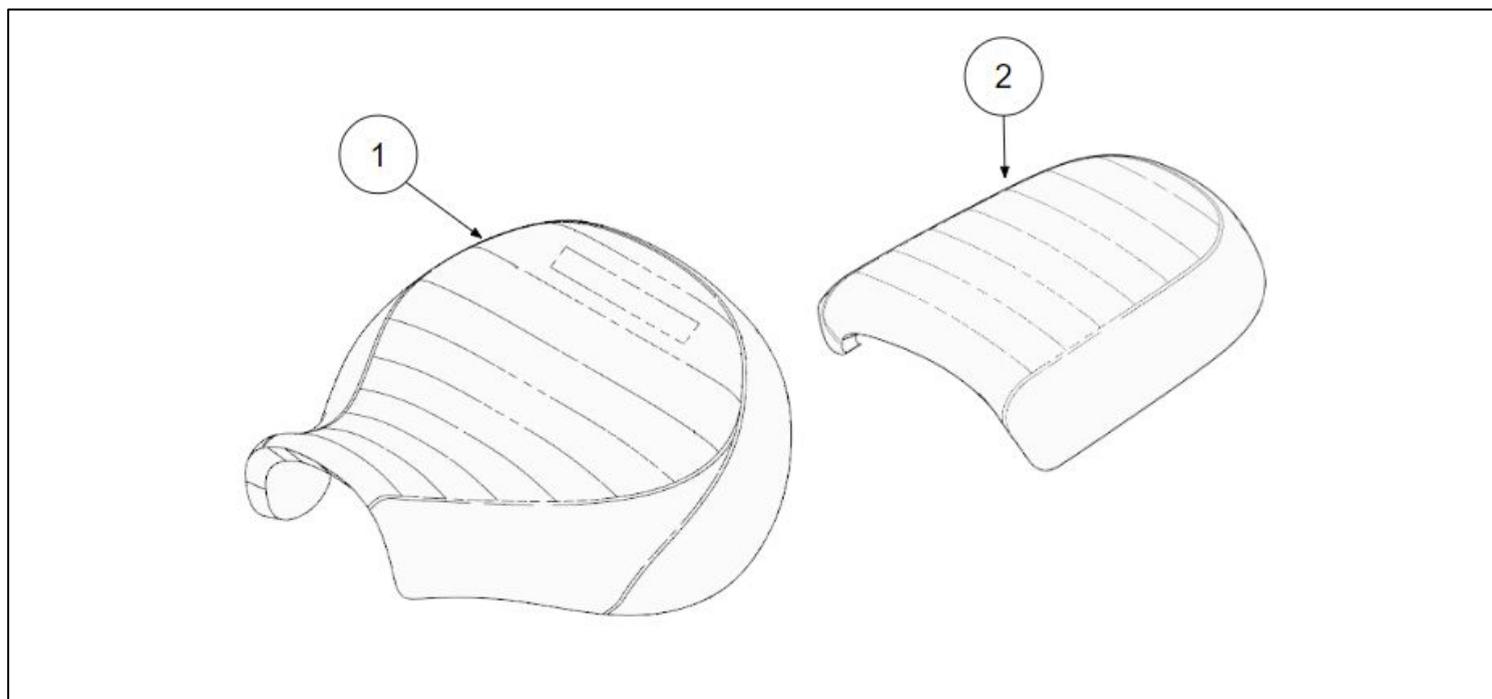

Item	Description	Qty
1	Seat cover, rider	1
2	Seat cover, passenger	1

1 Remove the bolt (1) from the front of the grab rail, and repeat on the other side of the vehicle. Retain the bolts for reuse.

	6mm hexagonal bit and socket wrench
--	-------------------------------------

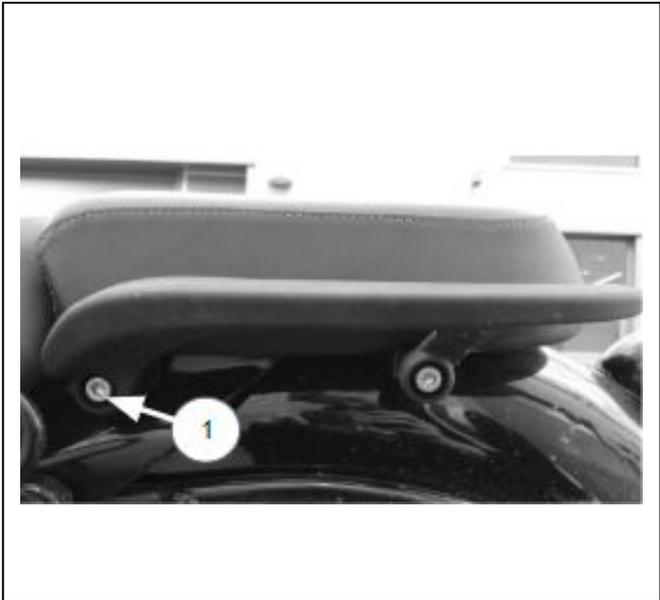


2 Lift the front of the passenger seat and unhook it from the frame. Remove the top hat inserts (2) from both sides, retaining them for reuse.




3 Remove the two bolts (3) and sleeves (4) securing the rider seat to the chassis. Retain the bolts and sleeves for reuse. Lift the rider's seat from the rear and pull rearwards to remove it.


	10mm bi-hexagonal socket and wrench
--	-------------------------------------

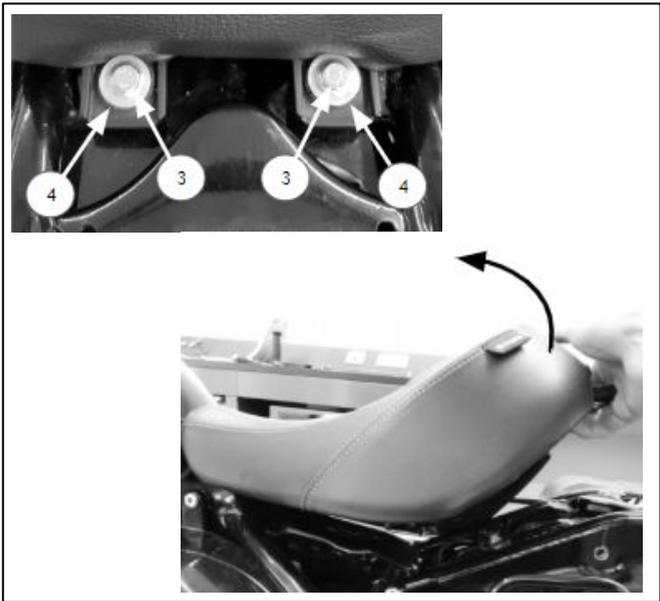

4 Fit the passenger seat cover over the seat, ensuring it is aligned correctly. Ensure the mount points of the seat pass through the holes in the cover (5). Pull the strings (6) tight and secure with a knot. Tuck the knot under the cover (7) and tie the elastic cords (8) tightly as shown.

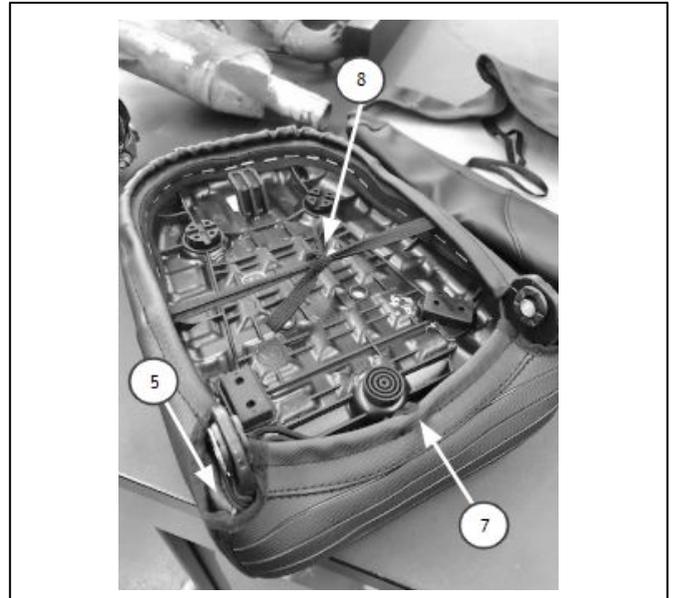


5 For the rider's seat, position the cover over the seat, ensuring the mount points pass through the holes in the cover (9). Pull the strings (10) tight and secure with a knot. Tuck the knot under the cover and tie the elastic cords tightly as shown (11).

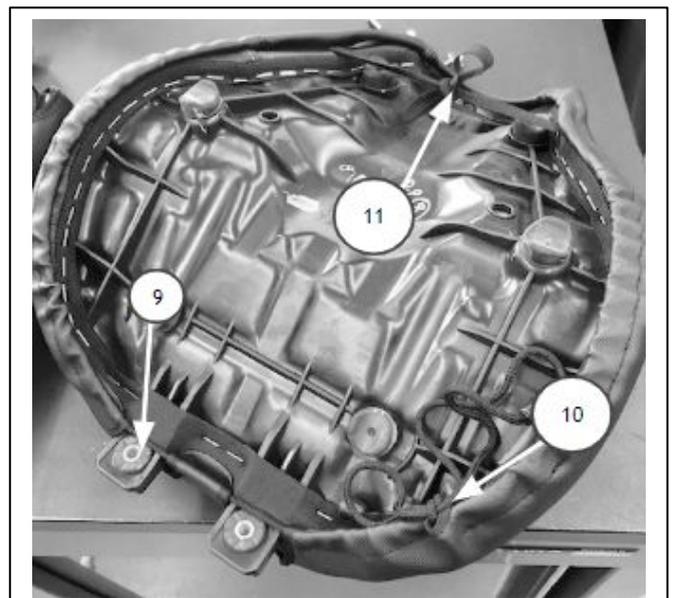

6 Locate the front of the rider's seat onto the tab behind the fuel tank and align the rear mounting points with their corresponding holes on the frame. Reinsert the two sleeves (4) and two bolts (3) and tighten to **12Nm**.




10mm bi-hexagonal socket and torque wrench

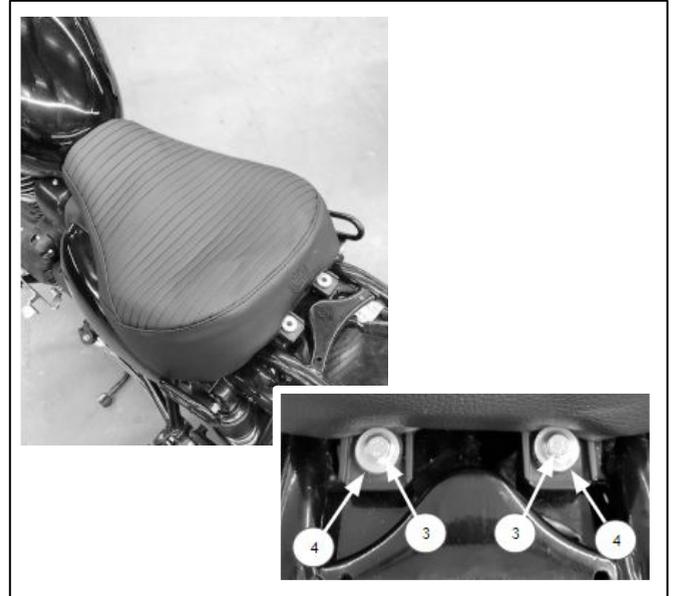

7 Hook the passenger seat into the frame at the rear and align the front mounting holes. Ensure that all cords are tucked away under the seat and reinsert the bolt (1) through the grabrail boss and into the frame. Repeat for the other side of the vehicle. Tighten the bolts to **25Nm**.



6mm hexagonal bit and torque wrench

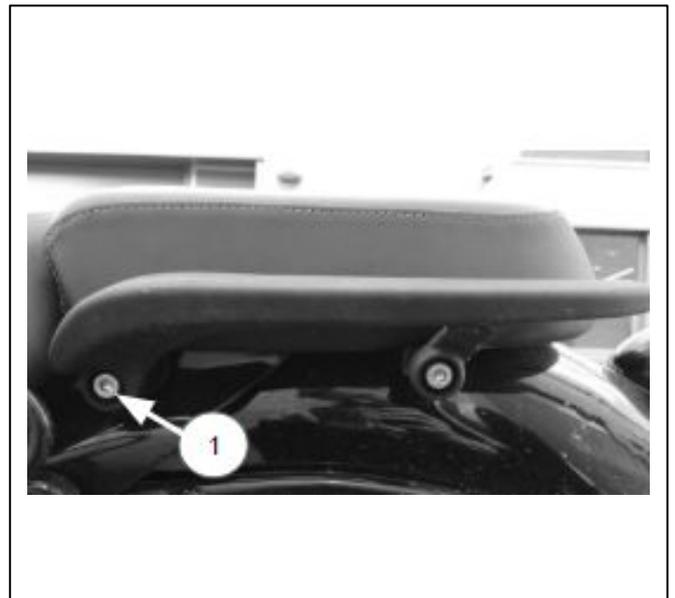

WARNING: After fitting any genuine Royal Enfield accessory always ride the motorcycle with caution and allow time to become familiar with any change in the motorcycle handling characteristics. Failure to become familiar with any change in the motorcycle handling characteristics may cause the motorcycle to become unstable and result in an accident.